

wi4-ab-1e-hb

DECKENLEUCHTE CEILING LUMINAIRE



TECHNISCHE DATEN TECHNICAL DATA



Hersteller *Manufacturer:*
Artikel-Nummer *Article Number:*

mawa
wi4-ab-1e-hb

Spannung *Voltage:*
Netzfrequenz *Power freq.:*
Schutzklasse *Protection class:*
Schutzgrad *Degree of protection:*

220 – 240 V
50/60 Hz
I
IP20

Leuchtmittel *Light source:*

1 × Standard-LED:
RA > 90 / 12,7 W / 700 mA / Vf 18 V

1 × LED Modul High CRI:
RA > 95 / 12,7 W / 700 mA / Vf 18 V

1 × dim2warm-LED:
Ra > 95 / 12 W / 350 mA / Vf 36,5 V



Dimmung *Dimming:*

DALI (-4)
Phasen- und abschnitt dimmbar
leading edge/trailing edge phase (-7)
Bluetooth (-9)

Anschlussleistung *Connected load:*






Standard 15 W
dim2warm 16 W

AUSTAUSCHBARKEIT REPLACE ABILITY

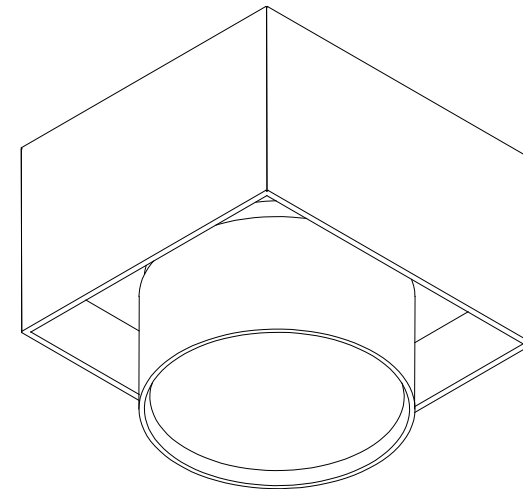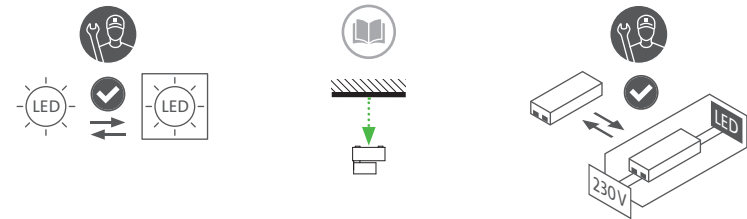


wi4-ab-1e-hb

DECKENLEUCTE CEILING LUMINAIRE

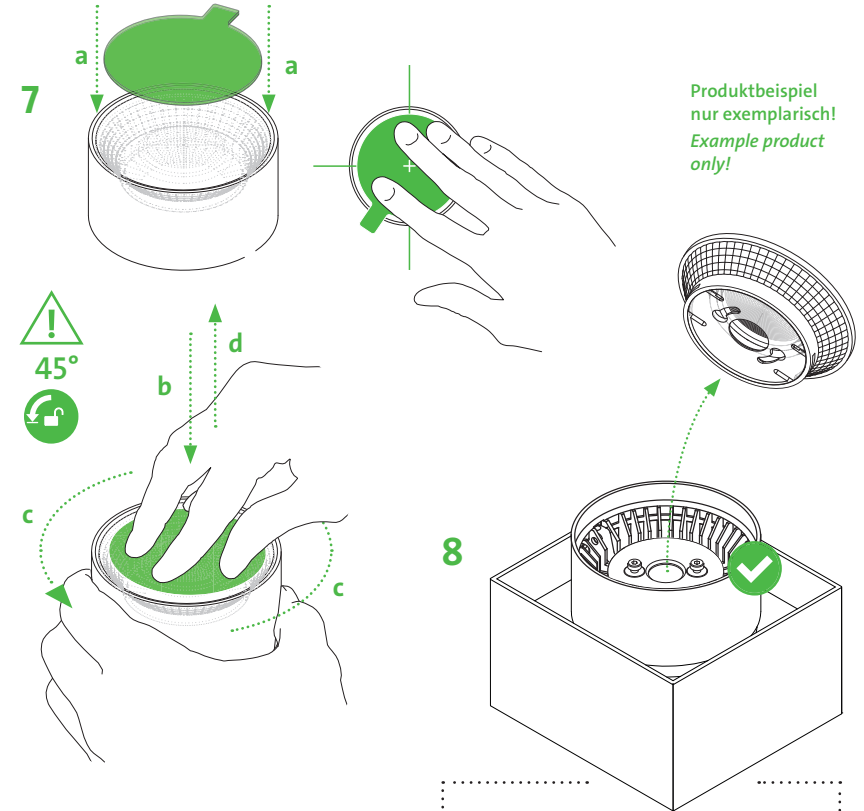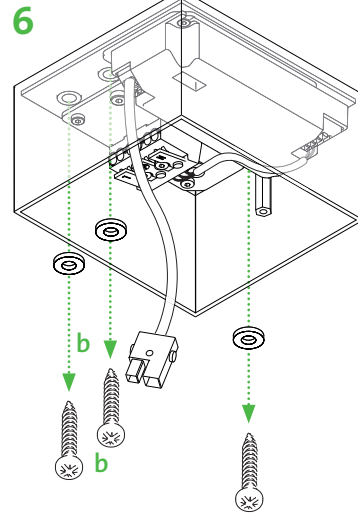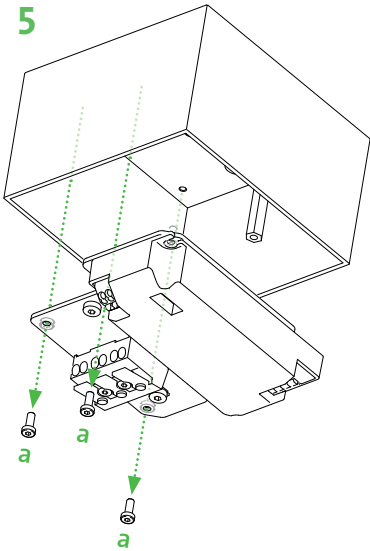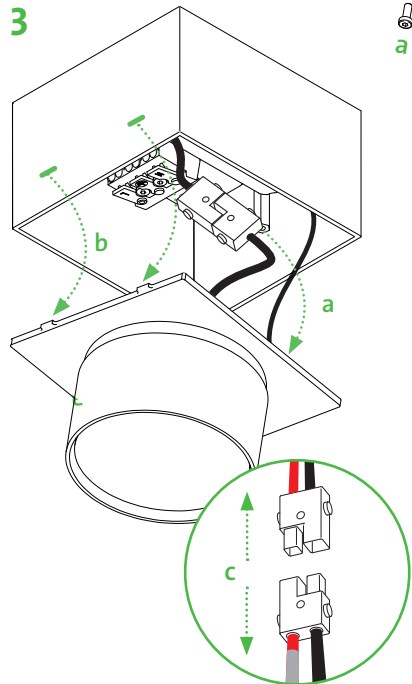

Produktbeispiel
nur exemplarisch!
Example product
only!

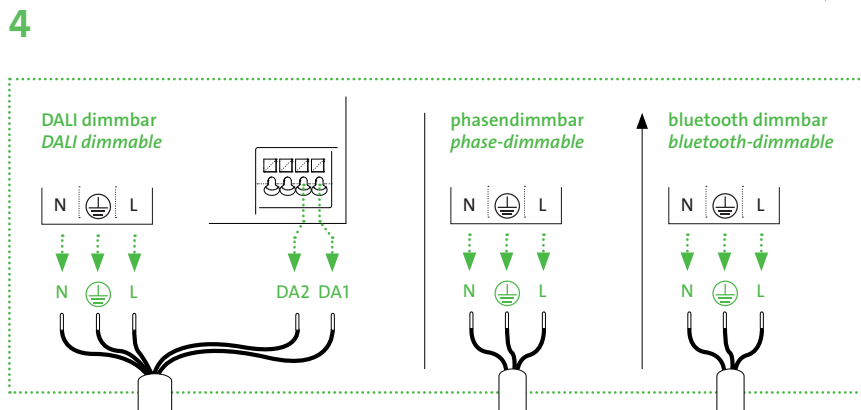

LED-Austauschanleitung
LED Replacement instructions

TD000145