

LED

bullauge 6

SYSTEMLEUCHTE **bu 6-450 /-600 /-900 /-1200-LED**

Die Wand-, Decken- und Pendelleuchte bu 6 ist jetzt als LED Ausführung erhältlich.

Durch die opake Plexiglasscheibe und die gleichmäßige Anordnung der LEDs entsteht eine diffuse und sehr homogene Leuchtfläche.





Dank mawa-Verschluss ist eine Ein-Mann-Revision unkompliziert durchführbar.

Farben:



pulverbesch. RAL 9016 weiß matt (9016)

weitere RAL-Farben auf Anfrage

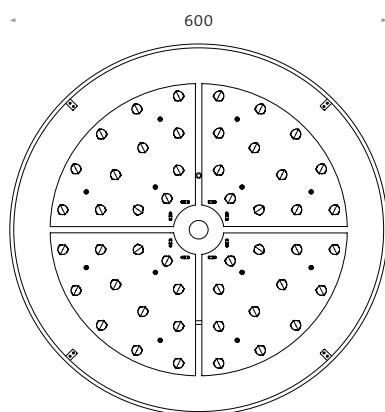

bu 6

Design: Martin Wallroth

Wand-, Decken- und Pendelleuchte,
Aluminiumgehäuse pulverbeschichtet RAL 9016
weiß matt, satiniertes Spezialplexiglas 3 mm,
Pendelabstand (inkl. Zuleitung): max. 2500 mm
Wandanschlussplatte mit 3 Distanzen (Standardlänge 50 mm), andere Längen auf Anfrage,
optional mit Uplight,

bu 6-450-LED-3/-4/-7/-8: 24 W, 3920 lm

bu 6-600-LED-3/-4/-7/-8: 77 W, 11040 lm

bu 6-900-LED-3/-4/-7/-8: 92 W, 15560 lm


bu 6-1200-LED-3/-4/-7/-8: 146,4 W, 25429 lm

3000 K, CRI < 90, EEI = A++-A

dimmbar: -3 (1-10V dimmbar), -4 (DALI),

-7 (Phasen-/abschnitt dimmbar), -8 (Push)

Produktinformation

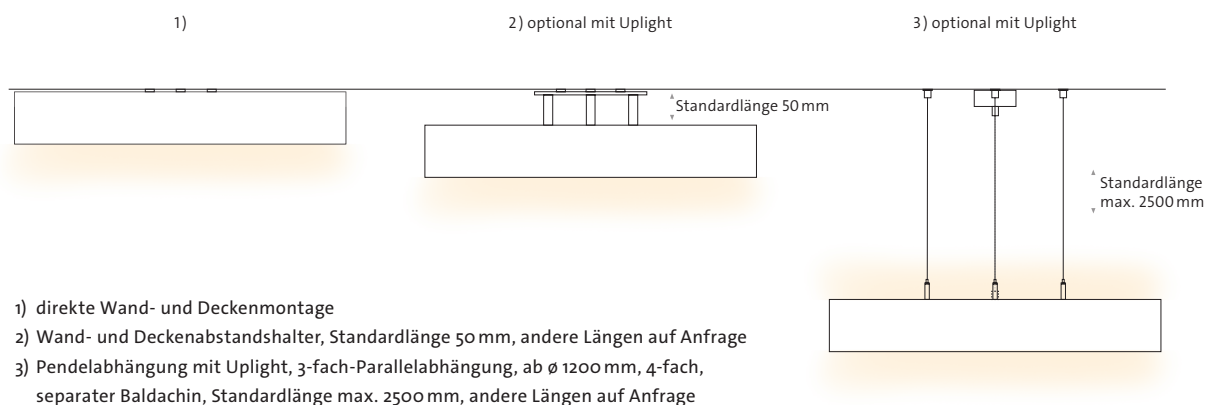

LED

bullauge 6



SYSTEM LIGHTING bu 6-450 /-600 /-900 /-1200-LED

The wall, ceiling, and pendant light »bu 6« is now available in an LED version. The opaque plexiglass panel and evenly distributed LEDs create a diffuse and uniform illumination.

Thanks to a mawa closure mechanism, revision is simple and can be done by one person.

colors:

- ☐ powder-coated RAL 9016 matt white (9016)
- additional RAL colors on request

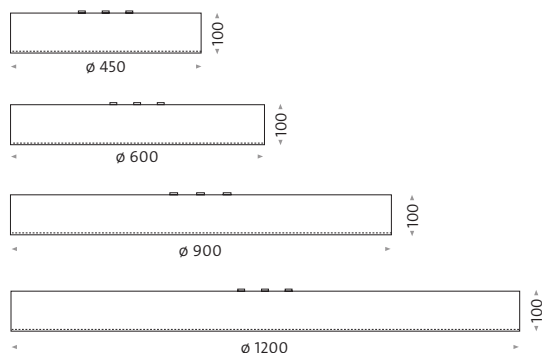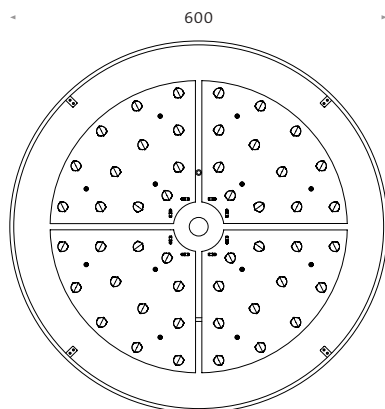

bu 6

Design: Martin Wallroth

wall, ceiling, and pendant light,
aluminum housing powder-coated RAL 9016
matt white, satin-finished special plexiglas
3 mm, pendant lengths (incl. supply): max.
2500 mm, wall attachment plate with 3
distancens (standard lengths 50 mm), other
lengths on request, optional with uplight,

bu 6-450-LED-3/-4/-7/-8: 24 W, 3920 lm

bu 6-600-LED-3/-4/-7/-8: 77 W, 11040 lm

bu 6-900-LED-3/-4/-7/-8: 92 W, 15560 lm

bu 6-1200-LED-3/-4/-7/-8: 146,4 W, 25429 lm

3000 K, CRI < 90, EEL = A*

dimmmable: -3 (1–10V dimmmable), -4 (DALI),

-7 (trailing and leading edge dimmmable),

-8 (push)

Product Information

