

Produktinformation

LED

wittenberg 4.o PROFILLEUCHE **wi4-pr**


Zylindrischer Lichtkopf in minimalistischem Design.
Keine sichtbaren Schrauben stören die filigrane Optik.
Gleichzeitig hohe Lichtausbeute bei kompakten Maßen
und geringem Energieverbrauch.

In das Profil mit einer Breite von 125 mm können außer
wittenberg 4.o Lichtköpfen weitere LED-Strahlerköpfe,
Up- und Downlights, Stromschienen- und LED-Systeme
integriert werden.

Neben möglichen Längen von 1 bzw. 2 Metern erlauben
Transport und Montage durchaus Profil- oder Segment-
längen bis zu 4 Metern.

Gehrungsgeschnittene Profile sind außerdem in ver-
schiedenen Winkeln möglich. Aluminiumgehäuse in
Standardfarben sind pulverbeschichtet. Individuelle
Sonderleuchten fertigt mawa auf Anfrage.

-  weiß matt (RAL 9016)
-  schwarz matt (RAL 9005)
-  grau metallic (DB 702)

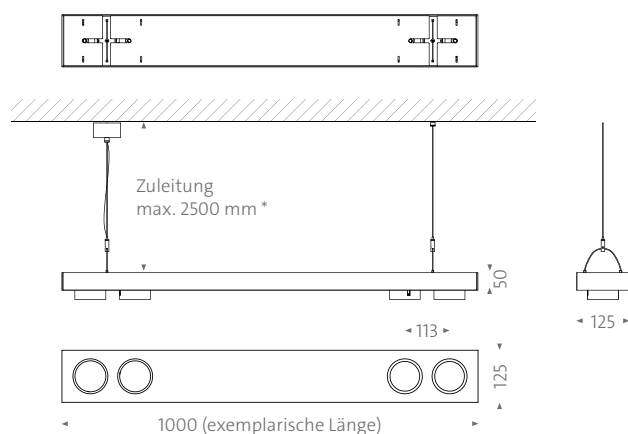

(* Standardmaß)



wi4-pr

Design: mawa,

Aluminiumgehäuse pulverbeschichtet,

Kopf 365° dreh- und 90° schwenkbar,

satiniertes Spezialplexiglas 3 mm,

LED Modul standard (High CRI):

2 × 2 LED, 12,7 W, Ra > 95 (typ. 98),

Lichtfarben / Lichtstrom: 2700 K / 930 lm,

3000 K / 980 lm, 4000 K / 1100 lm,

Lebensdauer Standard-LED:

L90(10k) > 61.000h (IES LM-80 / TM-21)

LED Modul dim2warm:

2 × 2 LED, 12 W, Ra > 95 (typ. 97)

Lichtfarben / Lichtstrom: 1800–3000 K / 1045 lm,

Lebensdauer dim2warm-LED:

L80 (10k) > 50.000 h (IES LM-80 / TM-21)

Sonderlichtfarben und auf Anfrage

Uplight-LED Modul:

Linear-Modul, L 560 mm, high efficiency, 24 W

Lichtfarben / Lichtstrom: 3000 K / 3100 lm

lineare LED-Module in verschiedenen Wattagen

auf Anfrage, EVG inkl.,

Schutzart: IP20

Wechseloptiken mit Abstrahlwinkel:

12°, 24°, 38° (mittels Saugheber oder Silikonpad
austauschbar)

wi4-pr-4 DALI

wi4-pr-7 Phasen- und abschn.

wi4-pr-9 Bluetooth

Pendelabhängung inkl. Zuleitung (-p) mit

Uplight (-p-u),

Gesamtpendellänge standard: 2500 mm

Gewicht: 5.000 g / m


LVK auf mawa-design.de unter Leuchten

Produktinformation

mawa®

wittenberg 4.0 PROFILLEUCHETE wi4-pr

Beispiele für individualisierte
Profilleuchten-Varianten und Gruppen

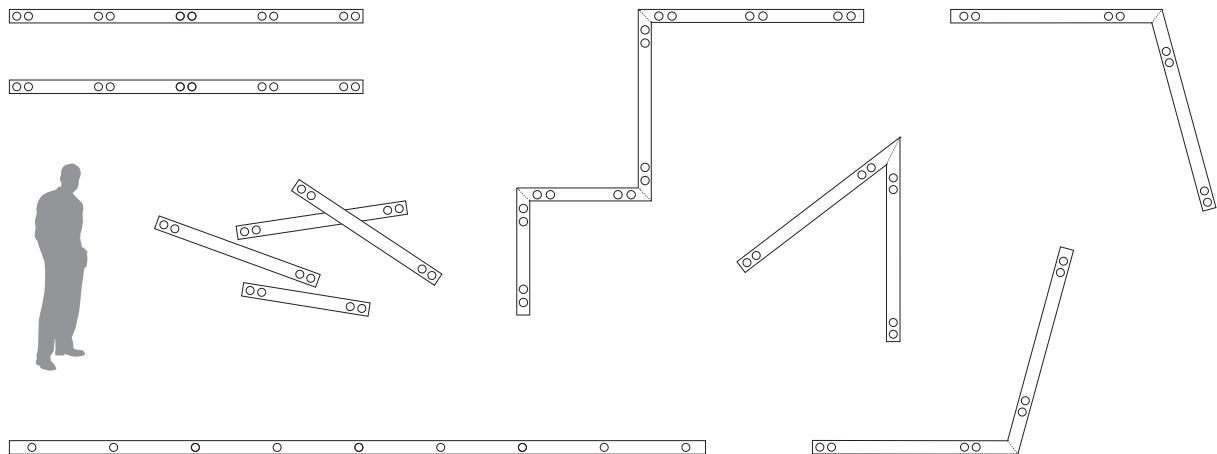

Product Information

LED

wittenberg 4.o PROFILE LIGHT wi4-pr


Cylindrical light head with minimalist design – no visible screws disturb the elegant appearance. The wittenberg 4.o luminaire series achieves high luminous efficacy with compact dimensions, low energy consumption and a large, well glare-free light emission surface.

In addition to wittenberg 4.o lighting heads, other LED spotlight heads, uplights and downlights, track and LED systems can be integrated into the profile with a width of 125 mm.

In addition to possible lengths of 1 or 2 metres, transport and installation certainly allow profile or segment lengths of up to 4 metres.

Mitre-cut profiles are also possible at various angles. Aluminum housings in standard colours are powder-coated. Production of individual custom lights on request.

-  white matt (RAL 9016)
-  black matt (RAL 9005)
-  grey metallic (DB 702)

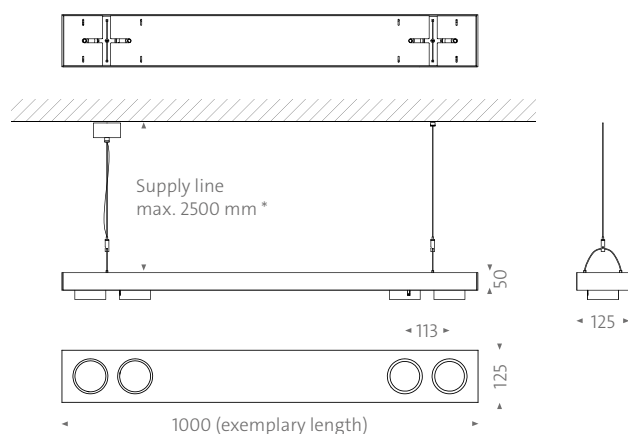

(* Standard size)

mawa®

wi4-pr

Design: mawa,

Aluminum housing powder-coated,
Spotlight 365° rotatable and 90° tiltable
satin-finished special plexiglass 3 mm,

LED module standard (High CRI):

2 × 2 LED, 12,7 W, Ra > 95 (typ. 98),

Light colour / luminous flux: 2700 K / 930 lm,
3000 K / 980 lm, 4000 K / 1100 lm

Life time LED standard:

L90(10k) > 61.000h (IES LM-80 / TM-21)

LED module dim2warm:

2 × 2 LED, 12 W, Ra > 95 (typ. 97)

Light colour / luminous flux: 1800–3000 K / 1045 lm,

Life time LED dim2warm:

L80 (10k) > 50.000 h (IES LM-80 / TM-21)

special light colours on request

Uplight-LED module:

Linear module, L 560 mm, high efficiency, 24 W

Light colour / luminous flux: 3000 K / 3100 lm

Linear LED modules in various wattages on
request, Control gear incl.,

Protection class: IP20

Exchangeable lenses with beam angle:

12°, 24°, 38° (exchangeable by means of vacuum
cup or silicone pad)

wi4-pr-4 DALI

wi4-pr-7 Leading edge/trailing edge

wi4-pr-9 Bluetooth

Pendant suspension incl. supply cable (-p) with
uplight (-p-u),

Total pendant length standard: 2500 mm

Weight: 5.000 g / m

LDC on mawa-design.de under Lighting

Product Information

mawa®

LED

wittenberg 4.0 PROFILE LIGHT **wi4-pr**

Examples of individualised
Profile luminaire variants and groups

