



linestra | li7b

AUFBAULEUCHTE FÜR WAND UND DECKE

Reduziertes Zusammenspiel aus Fassung und Leuchtmittel
inkl. Sicherungsklammer für Leuchtmittel

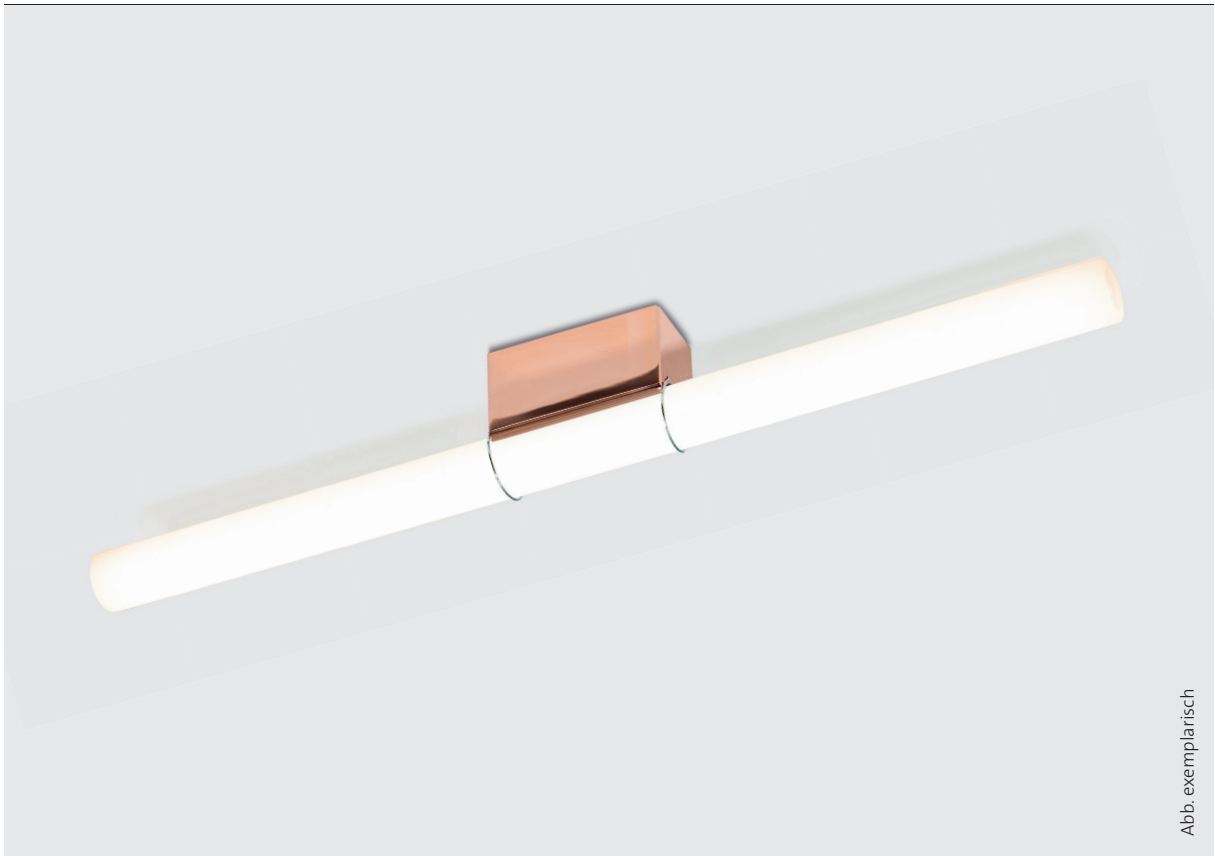


Abb. exemplarisch

Design: Martin Wallroth


Matchcode	Fassung	Schutzart	Schutzklasse
li7b	1 × S14d, max. 60W (exkl. Leuchtmittel)	IP20	II



linestra | li7b

AUFBAULEUCHTE FÜR WAND UND DECKE

Dimensionen:



Farben:

Gehäuse pulverbeschichtet

- schwarz matt (RAL 9005)
- weiß matt (RAL 9016)

Gehäuse glanzveredelt

- chrom
- kupfer
- messing
- vernickelt matt



Gehäuse: Stahl pulverbeschichtet oder glanzveredelt, inkl. Sicherungsklammer (silber)
Die Klammer fixiert das Leuchtmittel in der Fassung und erhöht die Sicherheit bei der Reinigung.
Somit ist die **linestra 7b** auch als Deckenleuchte einsetzbar.

Fassung: 1 × S14d, max. 60W

Empfehlung: Leuchtmittlempfehlung für kompatible Leuchtmittel des Herstellers Sigor:
Linienlampe S14d klar: [Art.-Nr. 5948301](#), 5 W, 2.200 K, 380 lm, Ra 90, dimmbar, 500 mm (EEK G)
Linienlampe S14d opal: [Art.-Nr. 5948401](#), 7 W, 2.700 K, 560 lm, Ra 90, dimmbar, 500 mm (EEK G)

Betriebsbereich: AC 220V–240V / 50Hz–60Hz

Schutzklasse: II

Schutzart: IP20 (Nicht für Montage im Spritzwasserbereich geeignet.)


Gewicht: 150 g



linestra | li7b

SURFACE-MOUNTED LUMINAIRE FOR WALL AND CEILING

Refined harmony between socket and light source
Socket housing made of solid steel

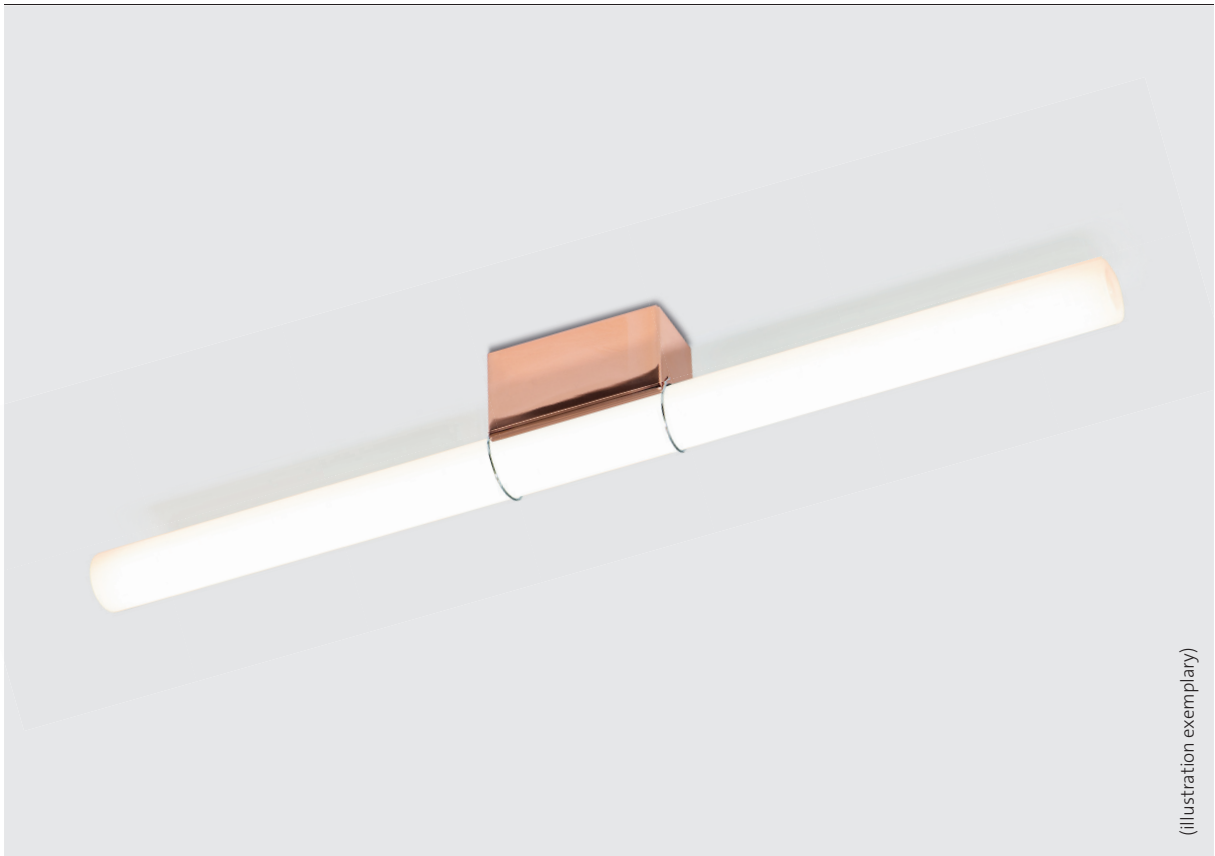

(illustration exemplary)

Design: Martin Wallroth


Matchcode	Socket	Degree of protection	Protection class
li7b	1 × S14d, max. 60W (lamp included)	IP20	II



linestra | li7b

SURFACE-MOUNTED LUMINAIRE FOR WALL AND CEILING

Dimensions:



Colours:

Housing powder-coated

■ black matt (RAL 9005)

□ white matt (RAL 9016)

Housing gloss-finished

■ chrome

■ copper

■ brass

■ nickel plated matt



Housing: Powder-coated or gloss-finished steel, incl. clamp (silver)
The clamp fixes the lamp in the socket and increases safety during cleaning.
Thus, the **linestra 7b** can also be used as a ceiling luminaire.

Socket: 1 × S14d max. 60W

Illuminant: lamp not included

Recommendation: Lamp recommendation for compatible lamps by manufacturer Sigor:
Linear lamp S14d clear: [Art. no. 5948301](#), 5 W, 2,200 K, 380 lm, Ra 90, dimmable, 500 mm (EEK G)
Linear lamp S14d opal: [Art. no. 5948401](#), 7 W, 2,700 K, 560 lm, Ra 90, dimmable, 500 mm (EEK G)

Operating area: AC 220V–240V / 50Hz–60Hz

Protection class: II

Degree of protection: IP20 (Not suitable for installation in splash water areas.)

Weight: 150 g