

wi4-ab-1e-hb

DECKENLEUCHTE CEILING LUMINAIRE

mawa®

TECHNISCHE DATEN
TECHNICAL DATA

Hersteller *Manufacturer:*
 Artikel-Nummer *Article Number:*

mawa
wi4-ab-1e-hb

Spannung *Voltage:*
 Netzfrequenz *Power freq.:*
 Schutzklasse *Protection class:*
 Schutzgrad *Degree of protection:*

220 – 240 V
 50/60 Hz
 I
 IP 20

Leuchtmittel *Light source:*

1 × Standard-LED:
 RA > 90 / 12,7 W / 700 mA / Vf 18 V

1 × LED Modul High CRI:
 RA > 95 / 12,7 W / 700 mA / Vf 18 V

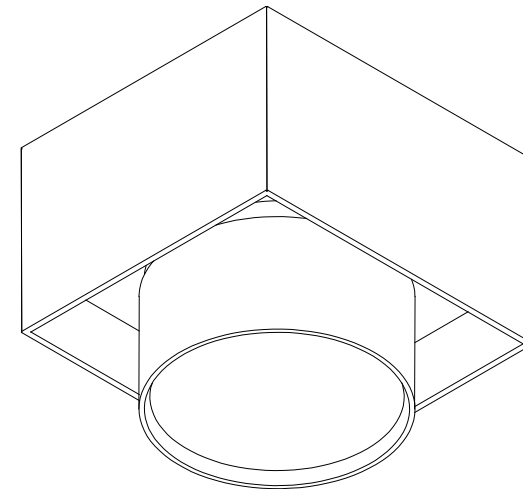
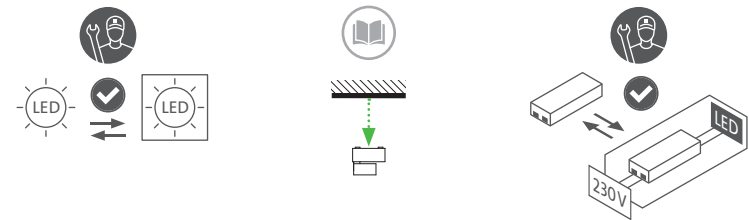
1 × dim2warm-LED:
 Ra > 95 / 12 W / 350 mA / Vf 36,5 V

Dimmung *Dimming:*

DALI (-4)
 Phasenan- und abschnitt dimmbar
leading edge/trailing edge phase (-7)
 Bluetooth (-9)

Anschlussleistung *Connected load:*

Standard 15 W
 dim2warm 16 W

AUSTAUSCHBARKEIT
REPLACE ABILITY

wi4-ab-1e-hb

DECKENLEUCHTE CEILING LUMINAIRE

mawa®

